

BÜFA®-AMBITION-GELCOAT
Premium-Gelcoat

Highest Surface Quality
in a Class with Lacquers

BÜFA®-AMBITION-GELCOAT

As Europe's leading supplier of gelcoats, BÜFA Composites continuously invests in the further development of its range of products.

One result is the highly brilliant BÜFA®-Ambition-Gelcoat on an isophthalic acid resin base. BÜFA®-Ambition can be used for a number of applications in which surface quality has the highest priority.

PRODUCT ADVANTAGES:

- Production of especially brilliant colours
- Outstanding weathering properties with excellent gloss retention
- For the highest surface quality (looks like lacquer)
- Unique colour accuracy, colour formulations according to customer wishes
- BÜFA®-Ambition is REACH compliant
- Convincing combination of flexibility and good mechanical properties when it comes to tensile and flexural strength



02-19 | Illustrations: BÜFA, Fotolia © Industrieblick, Africa Studio
The information given above is based on our current state of knowledge and experience. In view of the many factors that may influence processing and application of our products, the user is not relieved from carrying out his own tests and trials. No legally binding warranty of certain properties or suitability for a particular purpose can be derived from this information. It is the responsibility of the receiver or user of our products to observe proprietary rights as well as existing laws and regulations. The latest version of the EU Safety Data Sheet must also be observed. For further information and Technical Information Sheets, go to www.buefa.de.

ADVANTAGES WHEN PROCESSING THE PRODUCT:

- Reliable, uniform quality from batch to batch
- Good stability, optimal flow
- Outstanding covering properties
- No pigment separation
- Eliminates additional secondary finishing

PROCESSING METHODS:

- Hand and Spray application
- Available qualities: gelcoats as well as topcoats



SPECIAL FEATURES:

- Customer-specific colour matching, using especially colour stable pigments
- Weathering test is the basis for releasing the product, test duration approx. 3 months

PRODUCTION METHOD:

- Batchwise

RESULTS AFTER WEATHERING ACCORDING TO EN ISO 4892-2:

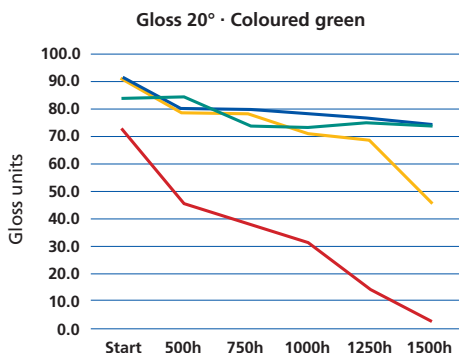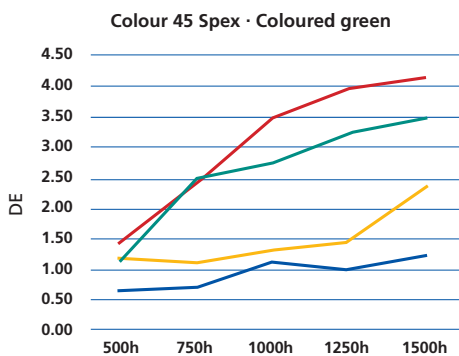

Reference
IP/NPG Gelcoat

Lacquer

BÜFA®-ISO-
Gelcoat 3000

BÜFA®-
Ambition-
Gelcoat

BÜFA®-
Ambition-
Gelcoat

Lacquer

BÜFA®-ISO-
Gelcoat 3000

Reference
IP/NPG Gelcoat

BÜFA

Composites

BÜFA Composite Systems GmbH & Co. KG
Hohe Loohe 2-8
26180 Rastede
GERMANY

Phone +49 4402 975-0
Fax +49 4402 975-300
compositesystems@buefa.de
www.buefa.de

A member of the BÜFA Group